


Banner Specifications:

- Standard width: 34⁵/₈"
- Acceptable length:
5 ft. to 7 ft., Single sided
5½ ft. to 7½ ft., Double sided
- Visible Banner Length:
Only ¼" is hidden at the top and bottom.

Prepare graphic:
Attach 2 self adhesive strips to back of graphic (top and bottom). Add staples along the top 1/4" for extra security. Slide strips into slot of aluminum rails and insert end caps.

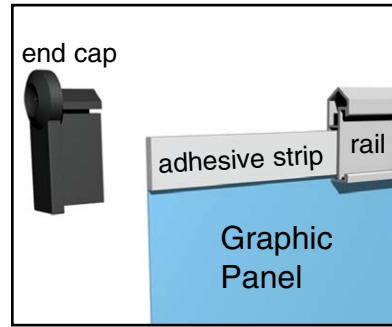

Attach bottom rail support to base, opposite the Mark Bric logo.



Attach pole to base.




Attach top rail support.



Attach bottom rail.



Attach top rail.

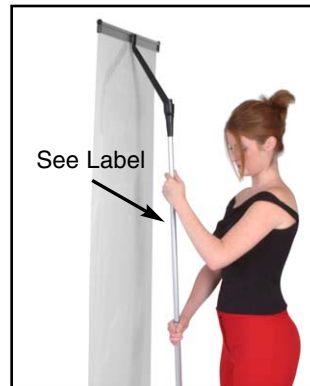

Raise top section of pole to apply tension, twist ccw to lock (cw to unlock).



Finished!



Double sided display uses 2 rail supports on bottom instead of base, as well as 2 rail supports on top.



During the transport of the stand, please use the cardboard tube to pack the graphic. Always slide the banner out of the aluminum rails before packing it into the tube. *Never roll the graphic banner around the aluminum rails, since this can damage the banner.*

IMPORTANT: Roll laminated banners print side out
Roll un-laminated banners print side in.

Mark Bric Display Corp.

4740 Chudoba Parkway
Prince George, VA 23875

Phone: 800-742-6275
804-862-4655

Fax: 800-565-9506
804-862-4302

www.markbric.com